


## D\_S-2W Series

**2W, FIXED INPUT ISOLATED & UNREGULATED  
TWIN OUTPUT DC-DC CONVERTER**



RoHS 

### FEATURES

High Efficiency up to 85%  
SIP Package  
1KVDC Isolation  
Temperature Range: -40°C to +85°C  
No Heat sink Required  
No External Component Required  
Internal SMD Construction  
Industry Standard Pinout  
RoHS Compliance

### APPLICATIONS

The D\_S-2W Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.


These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation  $\leq \pm 10\%$ );
- 2) Where isolation is necessary between input and output (isolation voltage  $\leq 1000\text{VDC}$ );
- 3) Where the regulation of the output voltage and the output ripple noise are not demanding.

Such as: purely digital circuits, ordinary low frequency analog circuits, and IGBT power device driving circuits.

### MODEL SELECTION

D050505S-2W

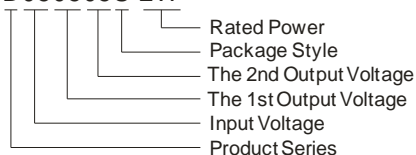

### MORNSUN Science & Technology Co.,Ltd.

Address: No. 5, Kehui St. 1, Kehui development center, Science Ave., Guangzhou Science City, Luogang district, Guangzhou, P.R.China.

Tel: 86-20-28203030

Fax: 86-20-28203068

[Http://www.mornsun-power.com](http://www.mornsun-power.com)

### PRODUCT PROGRAM

Part Number	Input		Output			Efficiency (% Typ)	Certificate
	Voltage (VDC)		Voltage (VDC)	Current (mA)			
	Nominal	Range		Max	Min		
D050505S-2W	5	4.5-5.5	5	200	20	80	UL
D050909S-2W			9	111	12	82	UL
D051212S-2W			12	83	9	82	UL
D051515S-2W			15	67	7	83	UL
D120505S-2W	12	10.8-13.2	5	200	20	80	UL
D120909S-2W			9	111	12	83	UL
D121212S-2W			12	83	9	85	UL
D121515S-2W			15	67	7	83	UL
D240505S-2W	24	21.6-26.4	5	200	20	81	UL
D240909S-2W			9	111	12	82	UL
D241212S-2W			12	83	9	84	UL
D241515S-2W			15	67	7	84	UL

### COMMON SPECIFICATIONS

Item	Test conditions	Min	Typ	Max	Units
Storage humidity				95	%
Operating temperature		-40		85	°C
Storage temperature		-55		125	
Temp. rise at full load			15	25	
Lead temperature	1.5mm from case for 10 seconds			300	
Short circuit protection*				1	s
Cooling		Free air convection			
Case material		Plastic (UL94-V0)			
MTBF		3500			K hours
Weight			2.8		g

\*Supply voltage must be discontinued at the end of short circuit duration.

### ISOLATION SPECIFICATIONS

Item	Test conditions	Min	Typ	Max	Units
Isolation voltage	Tested for 1 minute and 1mA max(Vin/Vout)	1000			VDC
	Tested for 1 minute and 1mA max(Vo1/Vo2)	1000			
Isolation resistance	Test at 500VDC (Vin/Vout)	1000			MΩ
	Test at 500VDC (Vo1/Vo2)	1000			
Isolation capacitance	(Vin/Vout)		90		pF
	(Vo1/Vo2)		90		


## OUTPUT SPECIFICATIONS

Item	Test conditions	Min	Typ	Max	Units
Line regulation	For Vin change of 1%			±1.2	
Load regulation	10% to 100% load(5V Output)		12.8	15	%
	10% to 100% load(9V Output)		8.3	10	
	10% to 100% load(12V Output)		6.8	10	
	10% to 100% load(15V Output)		6.3	10	
Output voltage accuracy		See tolerance envelope graph			
Temperature drift	100% full load			0.03	%/°C
Output ripple& Noise*	20MHz Bandwidth		100	150	mVp-p
Switching frequency	Full load, nominal input		70		KHz
*Test ripple and noise by “parallel cable” method. See detailed operation instructions at Testing of Power Converter section, application notes.					

Note:

- All specifications measured at TA=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
- See below recommended circuits for more details.
- Operation under minimum load will not damage the converter; However, they may not meet all specification listed, and that will reduce the life of product

## TYPICAL CHARACTERISTICS

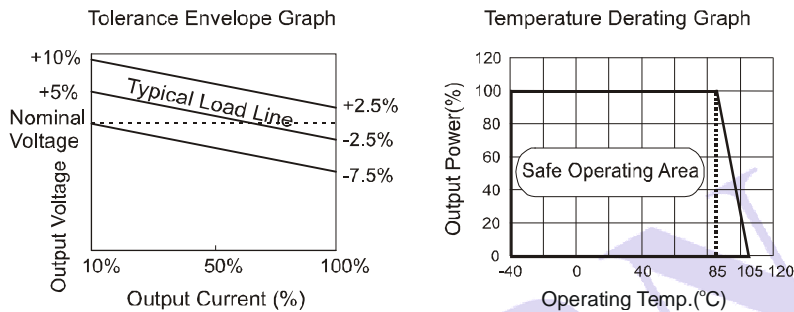

## OUTLINE DIMENSIONS & PIN CONNECTIONS

MECHANICAL DIMENSIONS	RECOMMENDED FOOTPRINT
<p>(Bottom View)</p> <p>(Side View)</p> <p>Note: Unit: mm (inch) Pin section: 0.50*0.30mm (0.020*0.012inch) Pin section tolerances: ±0.10mm (±0.004inch) General tolerances: ±0.25mm (±0.010inch)</p>	<p>TUBE OUTLINE DIMENSIONS</p> <p>Note: Unit: mm (inch) General tolerances: ±0.50mm (±0.020inch) L=530mm [20.866inch] Tube Quantity: 25pcs L=220mm [8.661inch] Tube Quantity: 10pcs</p>
FOOTPRINT DETAILS	
Pin	Function
1	Vin
2	GND
4	OV1
5	+Vo1
6	OV2
7	+Vo2

## APPLICATION NOTE

### Requirement on output load


To ensure this module can operate efficiently and reliably, a minimum load is specified for this kind of DC/DC converter in addition to a maximum load (namely full load). During operation, make sure the specified range of input voltage is not exceeded, the minimum output load **could not be less than 10% of the full load**. If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power.

### Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against over-current and short-circuits. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

### Recommended and testing circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

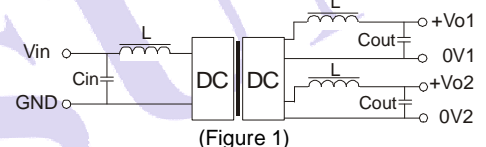

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the recommended capacitance of its filter capacitor sees (Table 1).


EXTERNAL CAPACITOR TABLE (Table 1)

Vin (VDC)	Cin (uF)	Vout (VDC)	Cou (uF)
5	4.7	5	4.7
12	2.2	9	2.2
24	1	12	1
--	--	15	0.47

It's not recommend to connect any external capacitor in the application field with less than 0.5 watt output.

### Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure 2).

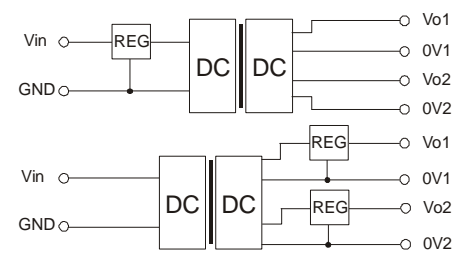

No parallel connection or plug and play.